


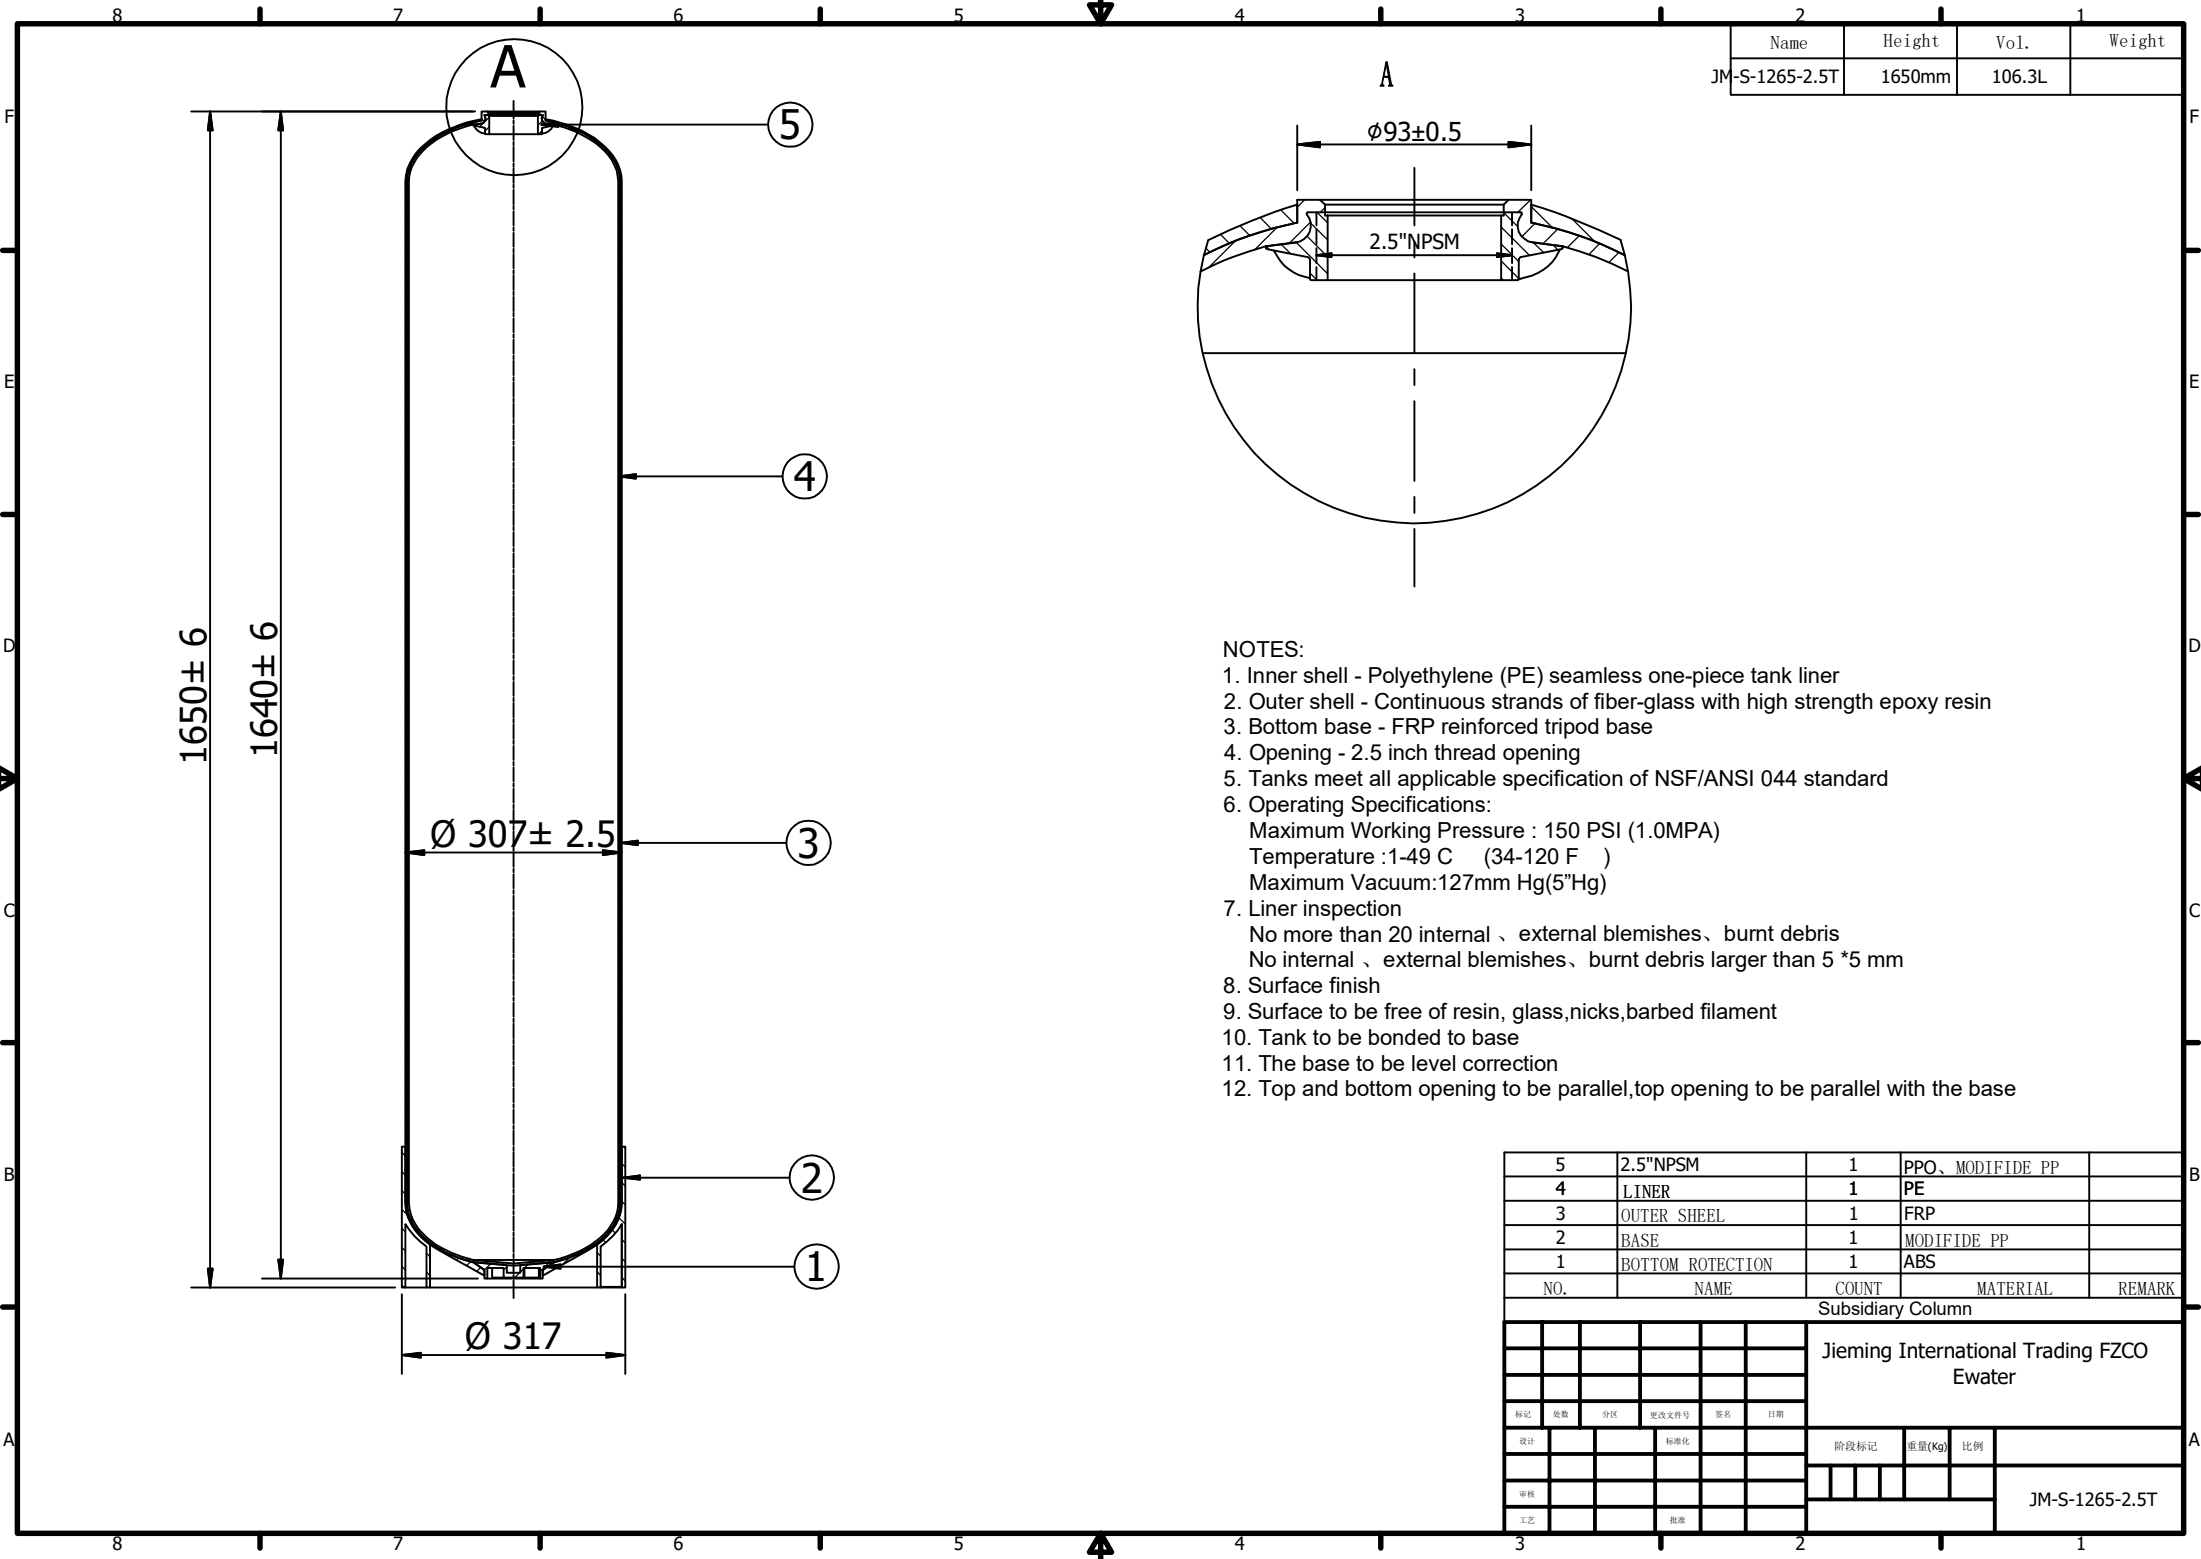

Name	Height	Vol.	Weight
JM-S-1265-2.5T	1650mm	106.3L	

NOTES:

- 1. Inner shell - Polyethylene (PE) seamless one-piece tank liner
- 2. Outer shell - Continuous strands of fiber-glass with high strength epoxy resin
- 3. Bottom base - FRP reinforced tripod base
- 4. Opening - 2.5 inch thread opening
- 5. Tanks meet all applicable specification of NSF/ANSI 044 standard
- 6. Operating Specifications:
 - Maximum Working Pressure : 150 PSI (1.0MPA)
 - Temperature :1-49 C (34-120 F)
 - Maximum Vacuum:127mm Hg(5"Hg)
- 7. Liner inspection
 - No more than 20 internal 、 external blemishes、 burnt debris
 - No internal 、 external blemishes、 burnt debris larger than 5 *5 mm
- 8. Surface finish
- 9. Surface to be free of resin, glass,nicks,barbed filament
- 10. Tank to be bonded to base
- 11. The base to be level correction
- 12. Top and bottom opening to be parallel,top opening to be parallel with the base

5	2.5"NPSM	1	PPO、MODIFIDE PP	
4	LINER	1	PE	
3	OUTER SHEEL	1	FRP	
2	BASE	1	MODIFIDE PP	
1	BOTTOM ROTECTION	1	ABS	
NO.	NAME	COUNT	MATERIAL	REMARK
Subsidiary Column				
			Jieming International Trading FZCO Ewater	
标记	数量	分区	更改文件号	签名
设计			标准化	
审核				
工艺			批准	
			阶段标记	重量(kg)
			比例	
			JM-S-1265-2.5T	