


Model	Height	Vol	Weight
JM-S-4894-6T6B	2400mm	1909 L	

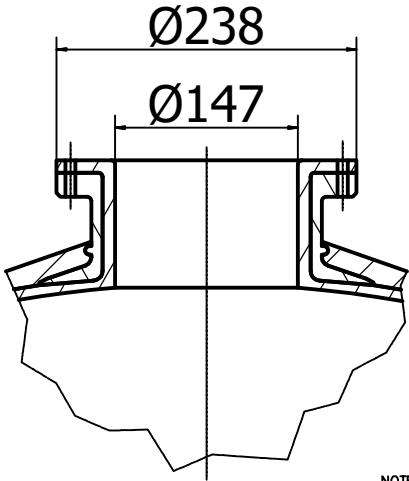

- NOTES:
1. Inner shell - Polyethylene (PE) seamless one-piece tank liner
 2. Outer shell - Continuous strands of fiber-glass with high strength epoxy resin
 3. Bottom base - FRP reinforced tripod base
 4. Opening - 6 inch Aluminium opening
 5. Tanks meet all applicable specification of NSF/ANSI 061 standard
 6. Operating Specifications:
Maximum Working Pressure : 150 PSI (1.0MPa)
Temperature :1-49 C (34-120 F)
Maximum Vacuum:127mm Hg(5"Hg)
 7. Liner inspection
No more than 20 internal , external blemishes , burnt debris
No internal , external blemishes , burnt debris larger than 5 *5 mm
 8. Surface finish
 9. Surface to be free of resin, glass,nicks,barbed filament
 10. Tank to be bonded to base
 11. The base to be level correction
 12. Top and bottom opening to be parallel,top opening to be parallel with the base

4	6"Flange	2	Aluminum	
3	Linner	1	PE	
2	Outer Shell	1	FRP	
1	Base	1	SMC	
NO.	NAME	COUNT	MATERIAL	REMARK

Subsidiary Column

Jieming International Trading FZCO Ewater									
设计			标准化			阶段标记	重量(吨)	比例	
审核	检测人	检测日期							
JM-S-4894-6T6B									

本图尺寸均以mm计，图中尺寸请勿量取