

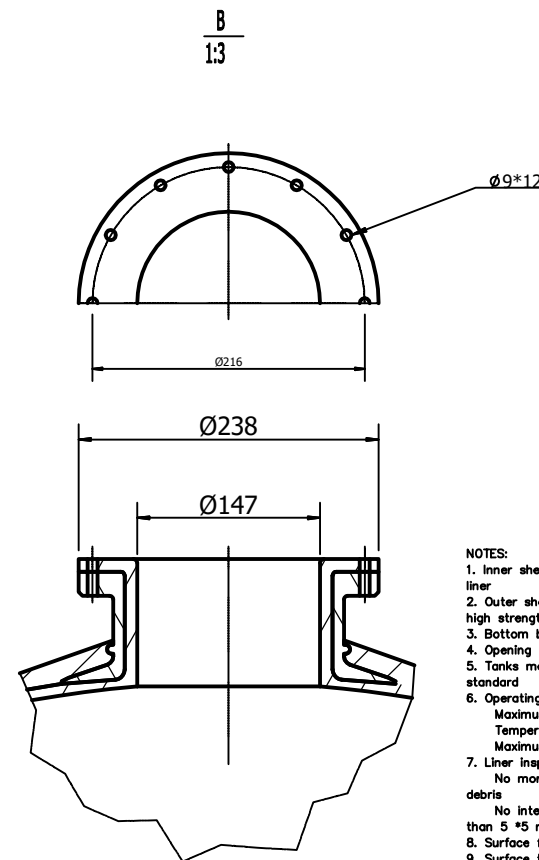
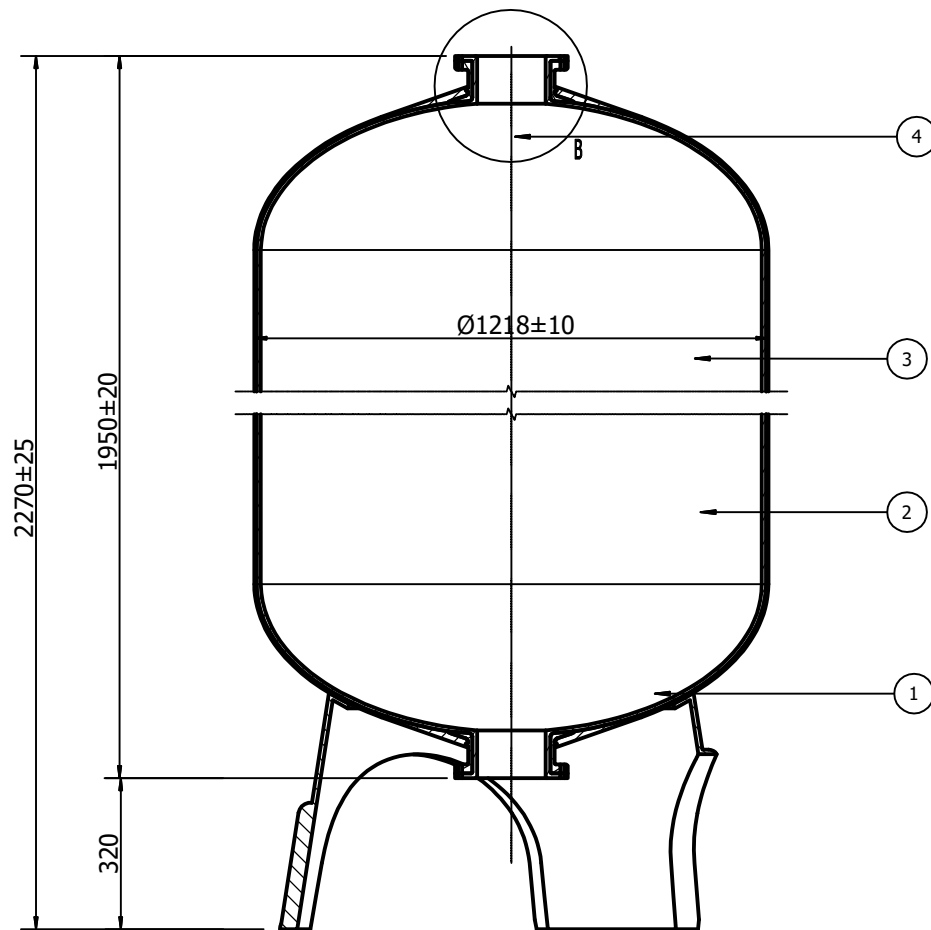


Model	Height	Vol	Weight
JM-H-H4872-6T6B	2270 mm	1743 L	

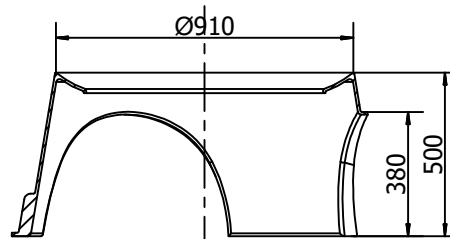

- NOTES:
1. Inner shell - Polyethylene (PE) seamless one-piece tank liner
 2. Outer shell - Continuous strands of fiber-glass with high strength epoxy resin
 3. Bottom base - FRP reinforced tripod base
 4. Opening - 6 inch Aluminium opening
 5. Tanks meet all applicable specification of NSF/ANSI 061 standard
 6. Operating Specifications:
 - Maximum Working Pressure : 150 PSI (1.0MPa)
 - Temperature : 1-49 C (34-120 F)
 - Maximum Vacuum: 127mm Hg(5 Hg)
 7. Liner inspection
 - No more than 20 internal , external blemishes , burnt debris
 - No internal , external blemishes , burnt debris larger than 5 *5 mm
 8. Surface finish
 9. Surface to be free of resin, glass,nicks,barbed filament
 10. Tank to be bonded to base
 11. The base to be level correction
 12. Top and bottom opening to be parallel,top opening to be parallel with the base



4	6"Flange	2	Aluminum	
3	Linner	1	PE	
2	Outer Shell	1	FRP	
1	Base	1	SMC	
NO.	NAME	COUNT	MATERIAL	REMARK

Subsidiary Column					
Jieming International Trading					
FZCO					
Ewater					
设计	审核	批准	标准	阶段	比例
审核	批准	标准	阶段	比例	
JM-H-H4872-6T6B					