
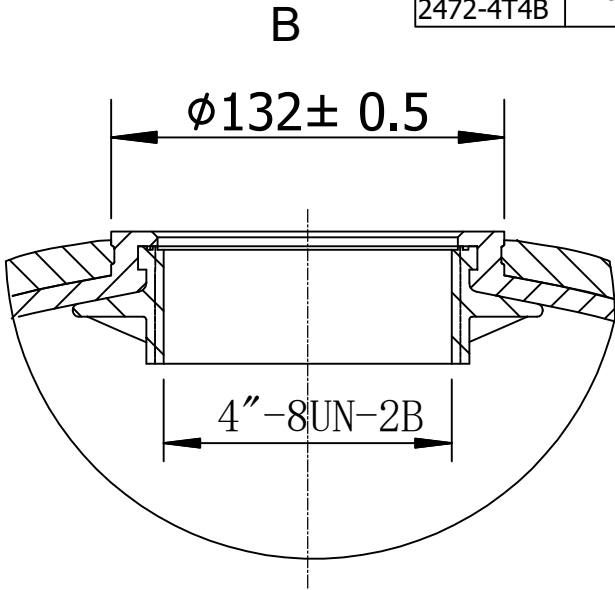


Model	Height	Vol	Weight
JM-S-2472-4T4B	1850mm	427L	

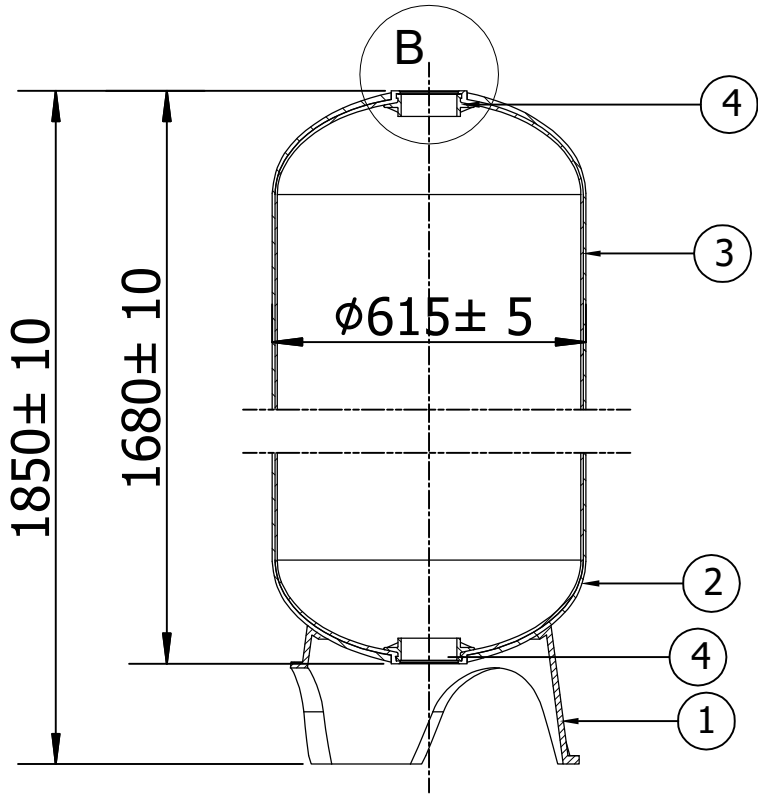

- NOTES:
- Inner shell - Polyethylene (PE) seamless one-piece tank liner
 - Outer shell - Continuous strands of fiber-glass with high strength epoxy resin
 - Bottom base - FRP reinforced tripod base
 - Opening - 4 inch thread opening
 - Tanks meet all applicable specification of NSF/ANSI 044 standard
 - Operating Specifications:
 - Maximum Working Pressure : 150 PSI (1.0MPa)
 - Temperature :1-49 C (34-120 F)
 - Maximum Vacuum:127mm Hg(5"Hg)
 - Liner inspection
 - No more than 20 internal 、external blemishes、burnt debris
 - No internal 、external blemishes、burnt debris larger than 5 *5 mm
 - Surface finish
 - Surface to be free of resin, glass,nicks,barbed filament
 - Tank to be bonded to base
 - The base to be level correction
 - Top and bottom opening to be parallel,top opening to be parallel with the base

4	4"-8UN	2	PPO	
3	Linner	1	PE	
2	OuterShell	1	FRP	
1	Base	1	SMC	
NO.	NAME	COUNT	MATERIAL	REMARK

Subsidiary Column

Jieming International Trading FZCO Ewater									
标记	数量	分区	更改文件号	签名	日期	阶段标记	重量(Kg)	比例	
设计			标准						
审核	检测人	检测日期							
JM-S-2472-4T4B									

