

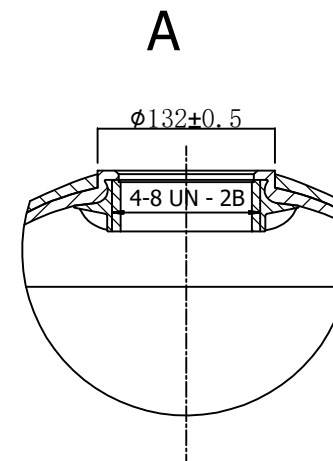
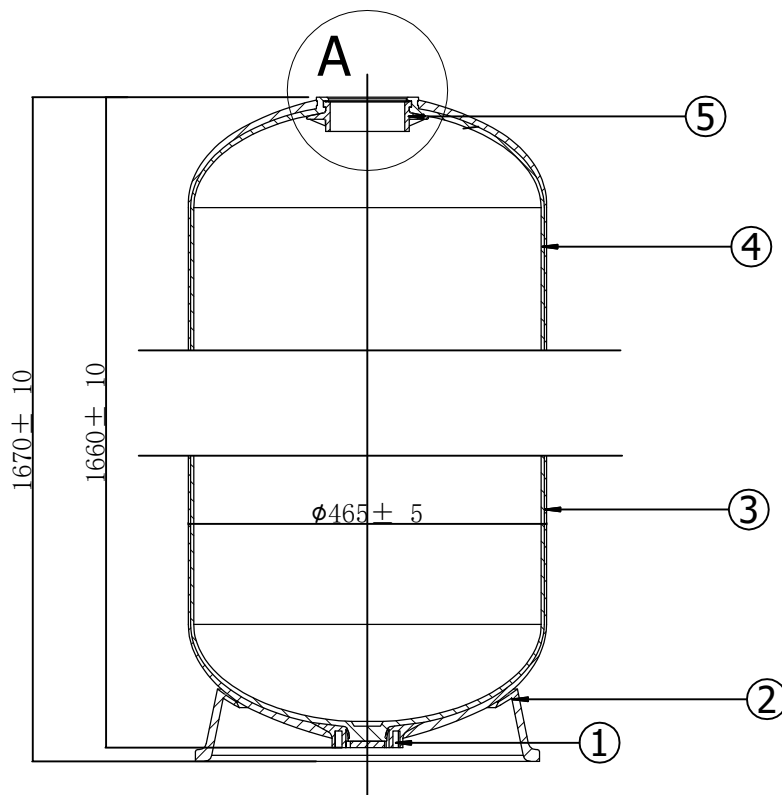


Name	Height	Vol	Weight
JM-S-1865-4T	1670 mm	249 L	

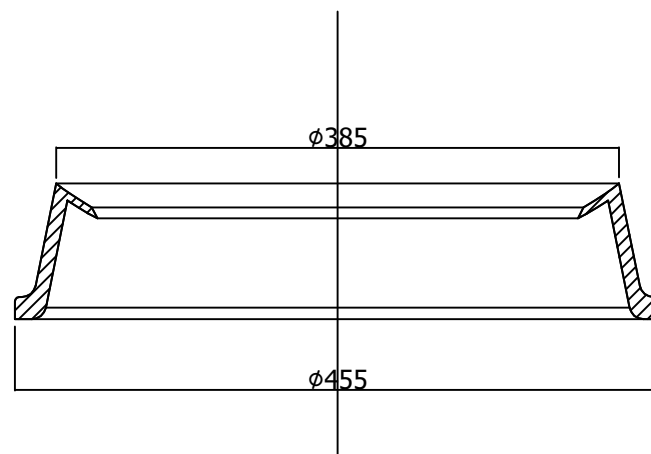

NOTES:

1. Inner shell - Polyethylene (PE) seamless one-piece tank liner
2. Outer shell - Continuous strands of fiber-glass with high strength epoxy resin
3. Bottom base - FRP reinforced tripod base
4. Opening - 4 inch thread opening
5. Tanks meet all applicable specification of NSF/ANSI 044 standard
6. Operating Specifications:
 - Maximum Working Pressure : 150 PSI (1.0MPa)
 - Temperature :1-49 C (34-120 F)
 - Maximum Vacuum:127mm Hg(5"Hg)
7. Liner inspection
 - No more than 20 internal 、 external blemishes、 burnt debris
 - No internal 、 external blemishes、 burnt debris larger than 5 *5 mm
8. Surface finish
9. Surface to be free of resin, glass,nicks,barbed filament
10. Tank to be bonded to base
11. The base to be level correction
12. Top and bottom opening to be parallel,top opening to be parallel with the base



5	4"-8UN	1	PPO、MODIFIED PP	
4	LINER	1	PE	
3	OUTER SHEEL	1	FRP	
2	BASE	1	MODIFIED PP	
1	BOTTOM PROTECTION	1	SMC	
NO.	NAME	COUNT	MATERIAL	REMARK

Subsidiary Column

					Jieming International Trading FZCO Ewater			
标记	规格	材质	变更文件号	签名	日期	阶段标记	重量(Kg)	比例
设计			标准化					
审核								
工艺			照图			JM-S-1865-4T		